



EASY:FAST

CODE: S1SFT140-ANR

It is characterized by the extraordinary instantaneous flow and the adjustable display. EASY: FAST is equipped with tank in pressure inside the cabin. It is primarily used to serve dishwashers and glass-washer that do not require the use of an internal break tank and for all applications where high flow power and cycles are required.

- Flow rate: 140 l/h at 15°C.
- Instantaneous flow rate that could be supplied: 4 l.
- Recovery rate from 25% bis 60%.
- Typical rejection: 95%.



Water quality
drinkable



Water temperature
5 - 35 °C



Minimum flow rate
400 l/h





Supply pressure
150 - 600 kpa



MADE IN ITALY



rev. 20 | 20-05

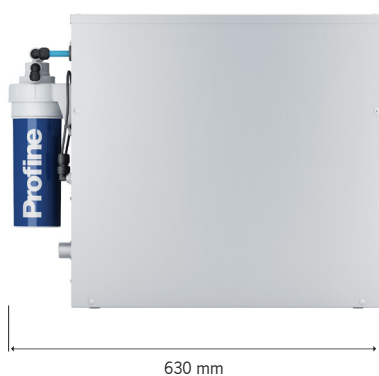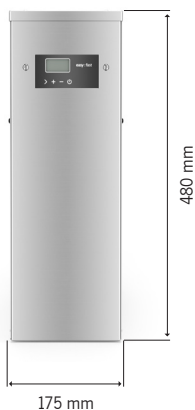

SMALL

Pre-filtration is guaranteed by PROFINE® BLUE which reduces and removes the turbidity present in water, chlorine, flavors and odors. Its nominal filtration rate is 5 microns. It is a quick-connect cartridge with extruded carbon block filter conforming to Italian DM 174/2004 and DM 25/2012.

APPLICATIONS: Any field of application in industrial, professional and Ho.Re.Ca. sectors. Glass-washer / dishwasher with boiler or with atmospheric pressure tank and rinse pump.

CAPACITY AND REPLACEMENT CONDITIONS

Profine® BLUE small Pre-filter	100 h *
Reverse osmosis membrane	UNTIL CLOGGING

* In relation to the characteristics of the water to be treated.

TECHNICAL SPECIFICATIONS

Equivalent sound level measured during normal operation (dB (A))	<70
Membranes	nr. 4
Inner pre-filtration	Profine® BLUE small
Weight	20 kg

POWER SUPPLY SPECIFICATIONS

Power supply type	MONOPHASE + GROUND
Nominal power (V)	230
Frequency (Hz)	50/60
Absorbed current (A)	1.5A
Power (W)	330W

